

ENGINEERING DEPARTMENT
UNIVERSITY OF DELHI
DELHI-110007
NOTICE INVITING QUOTATIONS

1817/12

Ref. No. UE/ 128 /DU/M-12(2016-2017) dated

Sealed percentage rate quotations are hereby invited from the contractors enlisted with CPWD, MES, Railways and any Govt./ public sector undertaking and working contractor of Delhi University for the work "Repairing of chajja, kota stone flooring and distempering, painting work in section cutting Labs of Geology Department, University of Delhi" So as to reach the office of the undersigned upto 3.00 P.M. on 22/7/16

S. No	Description of Items	Unit	Qty	Rate	Amount
1	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level				
a	1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	cum	0.08	5466.3	437
b	1:5:10 (1 cement : 5 coarse sand : 10 graded stone aggregate 40 mm nominal size)	cum	2	4004	8008
2	Providing and fixing ISI marked flush door shutters conforming to IS : 2202 (Part I) non-decorative type, core of block board construction with frame of 1st class hard wood and well matched commercial 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters: 35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws	sqm	4	1909.55	7638
3	Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete 200x10 mm	each	4	58.65	235
4	Providing and fixing ISI marked oxidised M.S. sliding door bolts with nuts and screws etc. complete 250x16 mm	each	2	166.2	332
5	Providing and fixing aluminium extruded section body tubular type universal hydraulic door closer (having brand logo with ISI, IS : 3564, embossed on the body, door weight upto 36 kg to 80 kg and door width from 701 mm to 1000 mm), with double speed adjustment with necessary accessories and screws etc. complete	each	2	1043.6	2087
5	Kota stone slab flooring over 20 mm (average) thick base laid over and jointed with grey cement slurry mixed with pigment to match the shade of the slab, including rubbing and polishing complete with base of cement mortar 1 : 4 (1 cement : 4 coarse sand) : 25 mm thick	sqm	60	1141.4	68484
6	Kota stone slabs 20 mm thick in risers of steps, skirting, dado and pillars laid on 12 mm (average) thick cement mortar 1:3 (1 cement: 3 coarse sand) and jointed with grey cement slurry mixed with pigment to match the shade of the slabs, including rubbing and polishing complete	sqm	6	1191.25	7148
7	Distempering with 1st quality acrylic distemper (ready mixed) of approved manufacturer, of required shade and colour complete, as per manufacturer's specification Two or more coats on new work	sqm	25	50.65	1266
8	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade : Two or more coats on new wor	sqm	30	74.4	2232
9	Repairs to plaster of thickness 12 mm to 20 mm in patches of area 2.5 sq. meters and under, including cutting the patch in proper shape, raking out joints and preparing and plastering the surface of the walls complete, including disposal of rubbish to the dumping ground within 50 metres lead With cement mortar 1:4 (1cement: 4 coarse sand)	sqm	5	259.15	1296
10	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty: Float glass panes of thickness 4 mm	sqm	3	690.7	2072
11	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete	sqm	400	9.9	3960
12	Distempering with 1st quality acrylic washable distemper (ready made) of approved manufacturer and of required shade and colour complete. as per manufacturer's specification. One or more coats on old work	sqm	250	28.8	7200
13	Finishing walls with Acrylic Smooth exterior paint of required shade Old work (Two or more coat applied @ 1.67 ltr/ 10 sqm) on existing cement paint surface	sqm	250	67.3	16825
14	Taking out doors, windows and clerestory window shutters (steel or wood) including stacking within 50 metres lead :Of area 3 sq. metres and below	each	2	54.8	110
15	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge. Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	cum	3	892.7	2678
16	Disposal of building rubbish / malba / similar unserviceable, dismantled or waste materials by mechanical means, including loading, transporting, unloading to approved municipal dumping ground or as approved by Engineer-in-charge, beyond 50 m initial lead, for all leads including all lifts involved	cum	10	123.7	1237

17	Providing and fixing hand rail of approved size by welding etc. to steel ladder railing, balcony railing, staircase railing and similar works, including applying priming coat of approved steel primer. G.I. pipes	kg	120	108.6	13032
18	Reinforced cement concrete work in beams, suspended floors, roofs having slope up to 15° landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases up to floor five level, excluding the cost of centering, shuttering, finishing and reinforcement, with 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size).	cum	1.5	6778.2	10167
19	Centering and shuttering including strutting, propping etc. and removal of form for Lintels, beams, plinth beams, girders, bressumers and cantilevers	sqm	20	332.15	6643
20	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete above plinth level. Thermo-Mechanically Treated bars	kg	200	68.1	13620
21	Demolishing R.C.C. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in- charge.	cum	1.5	1302.3	1953
22	Providing and applying birla / JK wall putty on wall surface (one or more coats) as required in thickness upto 1 mm i/c sand papering etc to prepare smooth as per direction of Engineer-in-charge.	sqm	50	59	2950
23	Repair of door window i/c taking out and refixing the same after completing the required repair and welding with all required materials etc complete as per the direction of Engineer-in-charge	each	5	356	1780
				Total	183391

Condition:

- 1 The work should be completed in 30 days.
- 2 1.50 % water/ electric charges will be deducted.
- 3 Rates should be quoted both in words & figures.
- 4 Undersigned reserves the authority to reject any or all the quotation without assigning any reason therefore
- 5 SC/ ST contractors shall enclose copies of attested caste certificate otherwise their quotation will not be accepted.
- 6 Contractor shall enclose the copy of Labour Licence, Registration with EPFO, ESIC & BOCW Welfare Board otherwise their quotation will not be accepted

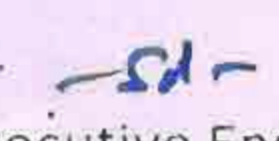
I/we hereby quote..... % above/below/at par on the estimated cost of Rs.183391.00

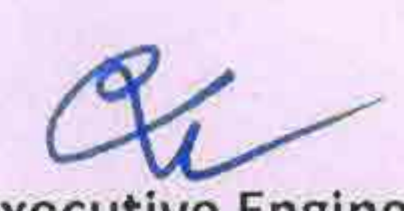
Undertaking:

I/we hereby undertake that my/our agency have not been black listed/debarred in any Govt. organization since last 3 years.

Contractor

- 1 The Director, Computer Center with a request to display the Notice Inviting Quotation on the Delhi University Website.
- 2 Sh. Ajay Malik, J.E. (C)
- 3 Ms. Kavita, J.A.C.T. to ensure the display of the tender notice on University website
- 4 Notice Board.


Executive Engineer


Executive Engineer