

ENGINEERING DEPARTMENT  
UNIVERSITY OF DELHI  
DELHI-110007

NOTICE INVITING QUOTATIONS

Ref. No. UE/ 128 /DU/EM (2016-2017)

Dated

27/7/16

Sealed item rate quotation are here by invited two envelop system one for eligibility and second for financial for the contractors enlisted with, C.P.W.D, MES, Railways & working contractors of Delhi University for " Electrical work to be carried out in A-2 chokidar hut ,garrage and servant quarter,A-1 kitchen and bedroom, A-3 study room and bathroom at 29/31 probyn road, University of Delhi.. 'So as to the reach the office of the undersigned upto 3.00 P.M. on 28/7/16 29/7/16

S. No	Description of Items	Qty	Nos	Rate	Amount
1	wiring for light point/fan point/exhaust fan point/cell bell point with 1.5 sqmm FRLS PVC insulated copper conductor , single core cable in the existing surface/ recessed PVC conduit with modular type, switch suitable size G.I box and earthing the point with 1.5 sqmm FR PVC insulated copper cond. Single core cable etc as reqd. Group B	20	nos		
2	S/D the following size FRLS of PVC insulated copper conductor cable in the existing surface /recess PVC conduit as reqd.				
a	1 x 1.5sqmm	125	mtr		
b	2 x 2.5 sqmm	25	mtr		
c	2 x 4 sqmm	100	mtr		
3	S/F Tiny Trip AC box complete with all accessories with plug and top on surface/recessed and making the good the same etc asreqd. At site and 1 nos 25 amp g series SP MCB connection etc as reqd. at site	2	nos		
4	S/F 6 module power box with screw lass decorative plate modular having 2 nos Switch 15/16 amp and 2 nos socket 6 pin 15/16 making connection etc as reqd.	10	nos		
5	S/F 3 module power box with screw lass decorative plate modular having 1 nos Switch 15/16 amp and 1 nos socket 6 pin 15/16 making connection etc as reqd.	2	Nos		
6	S/F/ testing & commissioning of prewired fluorescent fitting single box type fitting (1x40watts) complete with all accessories and tube etc. directly on ceiling or wall i/c connection with 1.5sqmm FR PVC copper cond. cable etc. as reqd. (TMC 501/136 ) (Philips make)	8	Nos		
7	Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required.				
a	5/6 amps switch	6	each		
b	3 pin 5/6 amp socket outlet	6	each		
8	Supplying and fixing stepped type electronic fan regulator on the existing modular plate switch box including connections but excluding modular plate etc. as required.	6	nos		
9	Supplying and fixing following way prewired SP&N MCB distribution board of steel sheet for 240 volts on surface/ recess complete with loose wire box, terminal connectors for all incoming and outgoing circuits, duly prewired with suitable size FR PVC insulated copper conductor up to terminal blocks, tinned copper bus bar, neutral link, earth bar, din bar, detachable gland plate, interconnections, powder painted including earthing etc. as required. (But without MCB/ RCCB/ Isolator)				
a	2 + 12 way, Double door	1	Nos		
b	2 + 8 way, Double door	1	nos		
10	Supplying and fixing 5 amps to 32 amps rating, 240/415 volts, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required. <b>Single pole</b>	16	nos		
11	Supplying and fixing following 63 amp, double pole, 240 volts, isolator in the existing MCB DB complete with connections, testing and commissioning etc. as required.	4	Nos		
12	S/F bulket head light with glass globe suitable for 60/100watt GLS lamp i/C connection etc as reqd. at site	4	nos,		
13	S/L cat-6 wire for data outlet in the existing conduit etc as reqd.	50	mtr		
14	S/F Wall Fan complete with all accessories i/c connection and testing the same etc.as reqd.(Orient/Crompton)	1	mtr		
15	S/I/T/C of 12" Heavy Duty Exhaust fan with suitable size louver shutter I/C wooden work if reqd.	1	nos		

/F installation, testing and commissioning of 100 amps MCCB (10 KA) capacity 3 pole 415 volts AC supply complete with connection in the suitable enclosure etc as reqd. at site 1 nos

**Total**

**Spcific make:**

- 1 Wire/cable : Finolex/Skytone/RR kabel/Grandlay
- 2 switch/socket : North-west/cona/legrand
- 3 Light Fittings : Philips
- 4 SP MCCB/Isolator : Legrand/Hagger

**Condition**

- 1 The work should be completed in 4 days.
- 2 Rates should be quoted both in words & figures.
- 3 CPWD specifications will be followed.
- 4 Undersigned reserves the authority to reject any or all the quotation without assigning any reason therofre
- 5 Contractor shall enclose copis of labour registration , ESIC, EPFO along with their bid otherwise their quotation will not be accepted

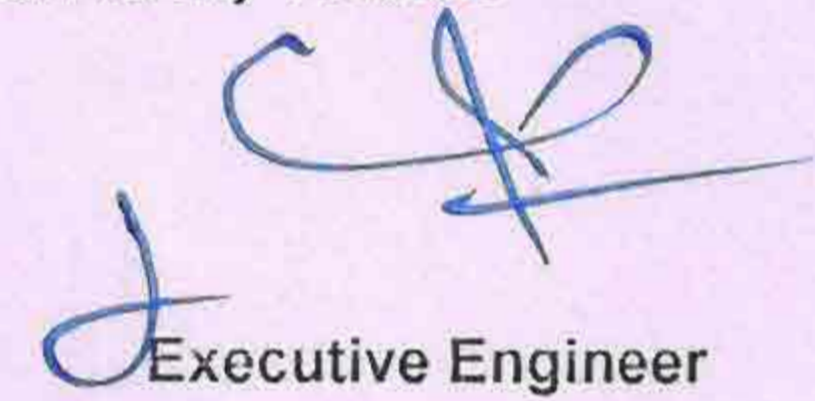
**Executive Engineer**

I/we hereby undertake that my/our agency have not been black listed/debarred in any Govt. organization since last 3 years.

( Contractor)

**Copy to:**

- 1 The director, Computer Center with a request to display the notice inviting quotation on the Delhi University Website.
- 2 Sh.S.M Goel J.E ( E )
- ✓ 3 Mrs. Kavita JACT to ensure the display of the quotation notice on University website.
- 4 Notice Board

  
**Executive Engineer**