

ENGINEERING DEPARTMENT

UNIVERSITY OF DELHI

Ref no. UE/198 / DU/ M- 61 (2016-17) dated

4/10/16

Sealed percentage rate quotations are here by invited from Contractors enlisted with CPWD, MES, Railways and working Contractors of Delhi University for the work" Repairs of cement plaster / broken glass pans & misc work in 1,3,7,10,16,30,32,83,85,24,26,27,36,42,54,57,67,75,76,77,69,70 at P.G.Men Hostel, University of Delhi. So as to reach the office of the under signed at 3.00 P.M. on dated : 05.10.2016

S.No	Description of item	Qty	Unit	Rate	Amount
1	Repairs to plaster of thickness 12 mm to 20 mm in patches of area 2.5 sq. meters and under, including cutting the patch in proper shape, raking out joints and preparing and plastering the surface of the walls complete, including disposal of rubbish to the dumping ground within 50 metres lead : With cement mortar 1:4 (1cement: 4 coarse sand) sqm 259.15	100	sqm	259.15	25915
2	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty: Float glass panes of thickness 4 mm	15	sqm	690.7	10361
3	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade : Old work (one or more coats)	800	sqm	32	25600
4	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade : One or more coats on old work	100	sqm	48.5	4850
5	Applying one coat of water thinnable cement primer of approved brand and manufacture on wall surface : Water thinnable cement primer	100	sqm	35.85	3585
6	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete. Semi rigid pipe 32 mm dia	10	each	76.75	767.5
7	Providing and fixing uplasticised PVC connection pipe with brass unions : 45 cm length 15 mm nominal bore	10	each	68.6	686
8	Providing and fixing PTMT swivelling shower, 15 mm nominal bore, weighing not less than 40 gms	10	each	141.75	1417.5
9	Providing and replacing pvc flushing cistern washers (below syphone) etc complete as per direction of Engineer in charge	20	each	15	300
10	Providing and replacing pvc flushing cistern ball cock (in side cistern) etc complete as per direction of Engineer in charge	10	each	35	350
11	Providing and replacing pvc flushing cistern syphone (in side cistern) etc complete as per direction of Engineer in charge	10	each	100	1000
					74832

Conditions :-

1. The work is to be completed with 20 days
2. 1.50 % water charges will be deducted
3. CPWD Specifications will be followed
4. Rates should be quoted both in words & figures.
5. Undersigned reserves the authority to reject any or all the quotation without any reason therefore .
6. SC/ST Contractors shall enclosed copies of attested cast certificate other wise there quotation will be accepted.
7. Contractor shall enclosed the copy of Labour Licence Registration with ETFO , ESIC and BOCW welfare board other wise there quotation will not be accepted .

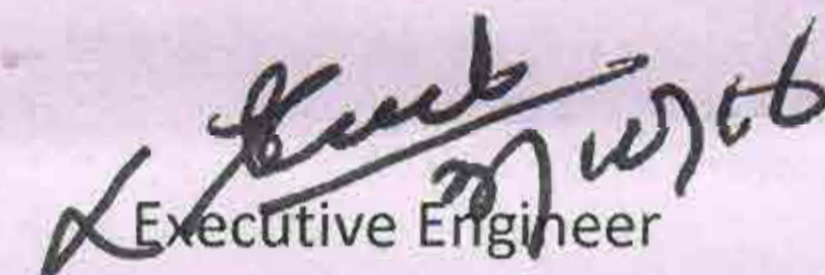
Executive Engineer

I here by quot rate % above /below / At Par on estimated cost of Rs.74832.00

Contractor

Copy to :

1. The Director computer center with a request to display the inviting quotation on the University of Delhi website.
2. Mrs. Kavita , JACT , for information and to ensure the display of the quotation on University website.
3. Section Officer -II
4. Notice Board


Executive Engineer