

**ENGINEERING DEPARTMENT
UNIVERSITY OF DELHI
DELHI-110007
NOTICE INVITING QUOTATIONS
(2015-2016)**

Ref. No. UE/ 375 /DU/M-

dated 14/12/15

Sealed percentage rate quotations are hereby invited from the contractors enlisted with CPWD, MES, Railways and any Govt./ public sector undertaking and working contractor of Delhi University for the work "Misc. repair work, distempering, painting etc in RT residence of ISH, University of Delhi " So as to reach the office of the undersigned upto 3.00 P.M. on 12-12-15

S. No	Description of Items	Unit	Qty	Rate	Amount
1	Repairs to plaster of thickness 12 mm to 20 mm in patches of area 2.5 sq. meters and under, including cutting the patch in proper shape, raking out joints and preparing and plastering the surface of the walls complete, including disposal of rubbish to the dumping ground within 50 metres lead : With cement mortar 1:4 (1 cement : 4 fine sand)	sqm	18	247.8	4460
2	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty: Float glass panes of thickness 4 mm	sqm	2	690.7	1381
3	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete.	sqm	1060	9.9	10494
4	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade : One or more coats on old work	sqm	330	48.5	16005
5	Distempering with 1st quality acrylic washable distemper (ready made) of approved manufacturer and of required shade and colour complete. As per manufacturer's specification. One or more coats on old work	sqm	580	28.8	16704
6	Finishing walls with Acrylic Smooth exterior paint of required shade Old work (Two or more coat applied @ 1.67 ltr/ 10 sqm) on existing cement paint surface	sqm	480	67.3	32304
7	Raking out joints in lime or cement mortar and preparing the surface for repointing or replastering, including disposal of rubbish to the dumping ground within 50 metres lead.	sqm	98	26.55	2602
8	Flush pointing with cement mortar 1:3 (1 cement : 3 fine sand) mixed with 2% of integral water proofing compound by weight of cement for flat tile bricks on top of mud phaska : With F.P.S. brick tiles	sqm	98	57.9	5674
9	Providing and fixing aluminium sliding door bolts, ISI marked anodised anodic coating not less than grade AC 10 as per IS : 1868), transparent or dyed to required colour or shade, with nuts and screws etc. complete : 300x16 mm	each	2	229.65	459
10	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete : 300x10 mm	each	4	112.1	448
11	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete : 125 mm	each	6	69.8	419
12	Providing and fixing glazed shutters for doors, windows and clerestory windows using 4 mm thick float glass panes, including ISI marked M.S. pressed butt hinges bright finished of required size with necessary screws. Second class teak wood, 35 mm thick	sqm	1	3262.9	3263
13	Providing and fixing aluminium hanging floor door stopper, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour and shade, with necessary screws etc. complete. Single rubber stopper	each	6	37.5	225
14	Providing and fixing fly proof galvanized M.S. wire gauge to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions with wire of dia 0.63 mm all complete. With 12 mm mild steel U beading	sqm	4	578.3	2313
15	Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete. Fixed to steel windows by welding	kg	50	109	5450
16	Disposal of building rubbish / malba / similar unserviceable, dismantled or waste materials by mechanical means, including loading, transporting, unloading to approved municipal dumping ground or as approved by Engineer-in-charge, beyond 50 m initial lead, for all leads including all lifts involved.	cum	8	123.7	990
17	Distempering with 1st quality acrylic distemper (ready mixed) of approved manufacturer, of required shade and colour complete, as per manufacturer's specification. Two or more coats on new work	sqm	180	50.65	9117
				Total	112309

Condition:

- The work should be completed in 20 days.
- 1.50 % water/ electric charges will be deducted.
- Rates should be quoted both in words & figures.
- Undersigned reserves the authority to reject any or all the quotation without assigning any reason therefore
- SC/ ST contractors should enclose copies of attested caste certificate otherwise their quotation will not be accepted.
- Contractor should enclose the copy of Labour Licence, Registration with EPFO, ESIC & BOCW Welfare Board otherwise their quotation will not be accepted


I/we hereby quote..... % above/below/at par on the estimated cost of Rs.112309.00

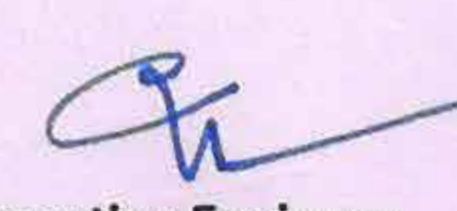
Undertaking:

I/we hereby undertake that my/our agency have not been black listed/debarred in any Govt. organization since last 3 years.

Contractor

- The Director, Computer Center with a request to display the Notice Inviting Quotation on the Delhi University Website.
- Sh. Jacob John J.E. (C)
- Ms. Kavita, J.A.C.T. to ensure the display of the tender notice on University website
- Notice Board.


Executive Engineer


Executive Engineer